

Summary	
Product	Interceptor
Description	Fully gas-tight Type 1 encapsulated suit with superior features and a high barrier against a wide range of chemicals. 15% lighter than the major competitor.
Fabric & weight	325gsm multi-layer construction: 10 barrier films with a non-woven diffusion layer sequenced to maximise chemical barrier.
Style *(see overleaf)	INT640
Seam Type	Stitched and PE taped inside and out
Colour	Blue



CE Certification		
EN Standard*	Description	Result
EN 340: 2002	Protective Clothing : general Requirements	Pass
EN 943-1 & 2:2002	Type 1: Protection against gaseous chemicals including part 2 for Emergency teams	Pass
EN 1073: 2002	Protection against dust particles that may be contaminated with radiations	Pass
EN14126: 2003	Protection against infectious agents	Pass

*All Lakeland garments are certified to the latest version of standards where possible

Mechanical Properties			
EN Standard	Description	Result	EN Class
EN 13934	Tensile Strength	244/229 N	6
EN 530	Abrasion Resistance	2000 Cycles	6
EN 863	Puncture Resistance	40.9 N	2
ISO 7854	Flex Cracking	>2500 Cycles	2
ISO 7854	Flex Cracking -30	>200 Cycles	2
ISO 9073	Trapezoidal tear md/cd	165.7/157.2 N	6
EN 13274-4	Resistance to Ignition	-	Pass
ISO 5082	Seam Strength	648 N	6

Chemical Repellency – EN 368 (for Type 6)		
	EN Class	
	Repellency	Penetration
Sulphuric Acid 30%	Class 3	Class 3
Sodium Hydroxide 10%	Class 3	Class 3
O-Xylene	Class 3	Class 3
Butan-1-ol	Class 3	Class 3

Chemical Permeation – EN 6529 – For Types 1 to 4		
The chemical list below is from EN 6529 Annex A2 and is intended to provide a broad spectrum of chemical types if general chemical suit assessment		
Chemical	CAS No	Result / EN Class
Acetone	67-64-1	480 / Class 6
Acetonitrile	75-05-8	480 / Class 6
Ammonia Gas	7664-41-7	480 / Class 6
Carbon Disulphide	75-15-8	480 / Class 6
Chlorine Gas	7782-50-5	480 / Class 6
Dichloromethane	75-09-2	480 / Class 6
Diethylamine	109-89-7	480 / Class 6
Ethyl Acetate	141-78-6	480 / Class 6
Hydrogen Chloride Gas	7647-01-0	480 / Class 6
n-Hexane	110-54-3	480 / Class 6
n-Heptane	142-82-5	480 / Class 6
Methanol	67-56-01	480 / Class 6
Sodium Hydroxide	1310-73-2	480 / Class 6
Sulphuric Acid (96%)	7664-93-9	480 / Class 6
Tetrahydrofuran	109-99-9	480 / Class 6
Toluene	108-88-3	480 / Class 6


Breakthrough times are a reflection controlled lab tests measuring "Normalised Breakthrough" as the time to reach a permeation rate of 1.0µg/min/cm². This does not imply "no breakthrough" and is not intended to indicate any duration of "safe-use" in any specific application. It is always the users' final responsibility to ensure a garment is suitable for the application.

Key Features	
<ul style="list-style-type: none"> 10 layer multi-barrier fabric with nonwoven diffusion layer creates protection against a wide range of high hazard chemicals Fully integral encapsulating suit with attached boots, gloves, hood with visor and integral BA pouch to rear Unique multi-layer fabric – 15% lighter than current commonly used limited life gas tight suits Stitched and double taped seams inside and out for high strength and security Double layer visor Lakeland patented visor sealing system provides a more secure seal between visor and fabric Double layer North Silvershield® glove system with St Gomain One Glove® option Front or rear entry design options with standard and wide vision visor options 122cm gas tight zip 	
Suggested Applications	
<ul style="list-style-type: none"> High hazard maintenance applications Emergency response teams Civil defence response Chemical clean ups and dangerous spills involving vaporising chemicals For protection against hazardous chemicals in liquid or vapour forms 	

Other Information

Lakeland Super-B Style Pattern – ergonomic design for freedom of movement, comfort and durability


All Lakeland coveralls are constructed using Lakeland's "Super-B" style pattern. Using the company's global knowledge and experience of protective clothing this takes European CE and North American ANSI styles to produce a garment design which combines the best elements of both to produce a garment which is generous in size yet better fitting and allows greater freedom of movement.

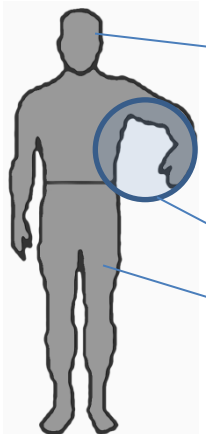

The Super-B style consists of 3 key elements:-

Three Piece Hood

Many cheaper garments feature a 2 piece hood. Lakeland's 3-piece hood creates a 3D profile which fits the head better and allows greater freedom of movement. It also fits better with face masks when worn.



Inset Sleeves

Most European styles use a "bat-wing" style (red line) in which the under-arm reaches down to the waist. The argument is that it creates more room in the chest. However, THIS CLEARLY RESTRICTS MOVEMENT WHEN THE USERS REACHES ABOVE HIS HEAD, PLACING STRESS ON THE CROTCH AREA.

However, Lakeland use an inset sleeve (blue line) which follows the contours of the body and allows much greater freedom of movement

Two-piece diamond crotch gusset

Commonly garments have four seams – two body and two leg – that meet at one point in the crotch. This is a key weak point and often results in tearing and rip-outs. Lakeland inserts a two-piece diamond shaped crotch that spreads the stress and creates a more 3D fitting shape, improving wearer movement, comfort and enhancing overall durability

The unique combination of three key elements of the Super-B style coverall makes Lakeland garments the best designed available

Other Design Features

All Lakeland chemical suits (TomteX & ChemMAX) feature a front fastening consisting of a double zip with storm flaps. This ensures both full protection against sprays to the front of the garment and easy donning and doffing.

In addition ChemMAX garments (Except ChemMAX 4) feature wide double layer knee-pads to enhance comfort, durability and safety.




Sizing



Size	Body Height	Chest
S	164-170cm	84-92cm
M	170-176cm	92-100cm
L	176-182cm	100-108cm
XL	182-188cm	108-116cm
XXL	189-194cm	116-124cm
XXXL	194-200cm	124-132cm


Seams

Lakeland garments use 3 types of seams:-




Serged or Stitched

Safeguard GP
MicroMAX NS



Bound

Safeguard 76 / Diamant
MicroMAX
Cool Suit



Stitched & Taped

MicroMAX TS
TomteX
ChemMAX

Storage, Shelf-life and Disposal

Storage

Lakeland garments can be stored in normal storage areas and require no special condition. Keep in cool, dry areas where possible and away from direct heat and sunlight

Shelf-Life

Lakeland coveralls are primarily manufactured from inert polymers (usually polypropylene and/ or polyethylene which should normally degrade over longer periods in excess of 10 years. Garments are supplied in sealed bags and so a shelf life of ten years or more should be reasonable under normal conditions. However, we recommend that after 5 years Type 3 and 4 chemical suits should be disposed of and replaced or used for training only. Some discoloration of especially white fabrics may occur over time though this will not affect performance. In any circumstances it is the users' responsibility to check garments for damage tears or wear before use

Disposal

Polymers used in Lakeland garments are generally inert, non-harmful and non-toxic and can be disposed of by incineration or to landfill according to local regulations. However, any garments contaminated with chemicals must be disposed of according to the requirements of the chemical or cleaned before disposal

For further information see www.lakeland.com/europe or contact sales-europe@lakeland.com

No Information provided is intended to guarantee product suitability for any specific application:

It is always the users final responsibility to ensure garment suitability

Lakeland Industries Europe Ltd, Unit 2, Jet Park II, Newport, East Yorkshire, UK HU15 2RP

UK Company Registration No: 4500660: For financial information see www.lakeland.com/financial